

1 UPSD 32-50 180



1-

TF

: -25 .. 110 °C  
 : 60 °C  
 : 983.2 / 3

: 110  
 : AAA,EAC

: EN-JL1030  
 : ASTM 30 B  
 : , PES/PP

.T : - 80 0C: 40 °C



: 10  
 : G 2  
 : PN 10  
 : 180

:  
 1: 75  
 2: 100





: 105  
 : 50 Hz  
 : 1 x 230

1: 0.32 A  
2: 0.44 A  
3: 0.46 A  
- : 2.5  
(IEC 34-5): X2D  
(IEC 85): F  
:  
:  
:  
:  
C : 10.7  
: 11.1  
: 0.018<sup>3</sup>  
: RS  
: 8413703000


**UPSD 32-50 180 50**

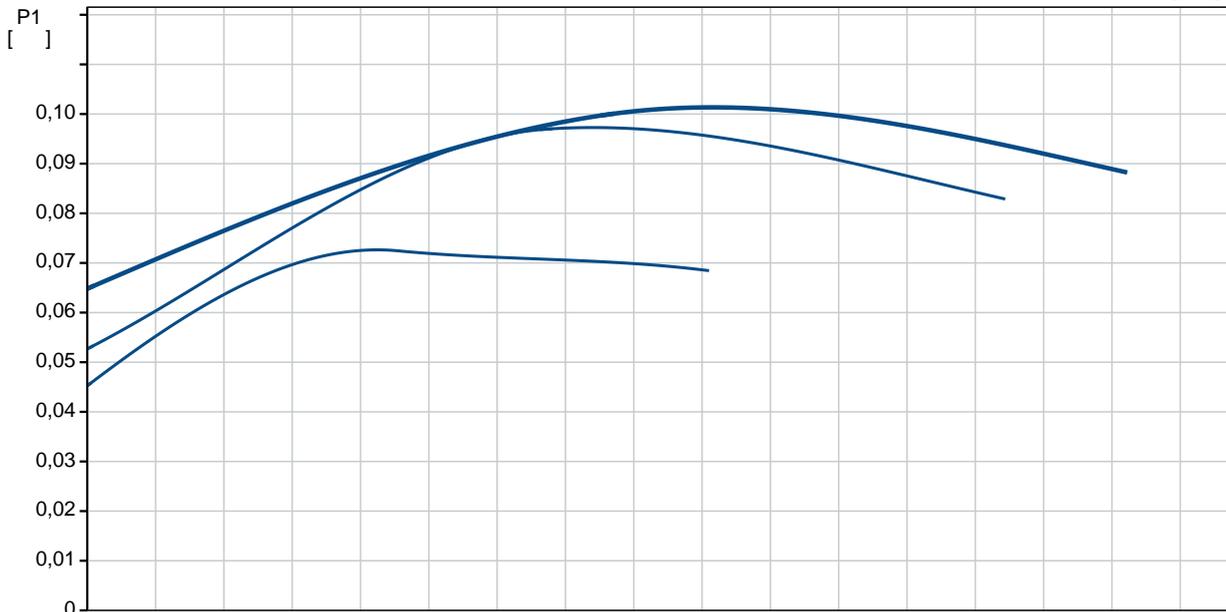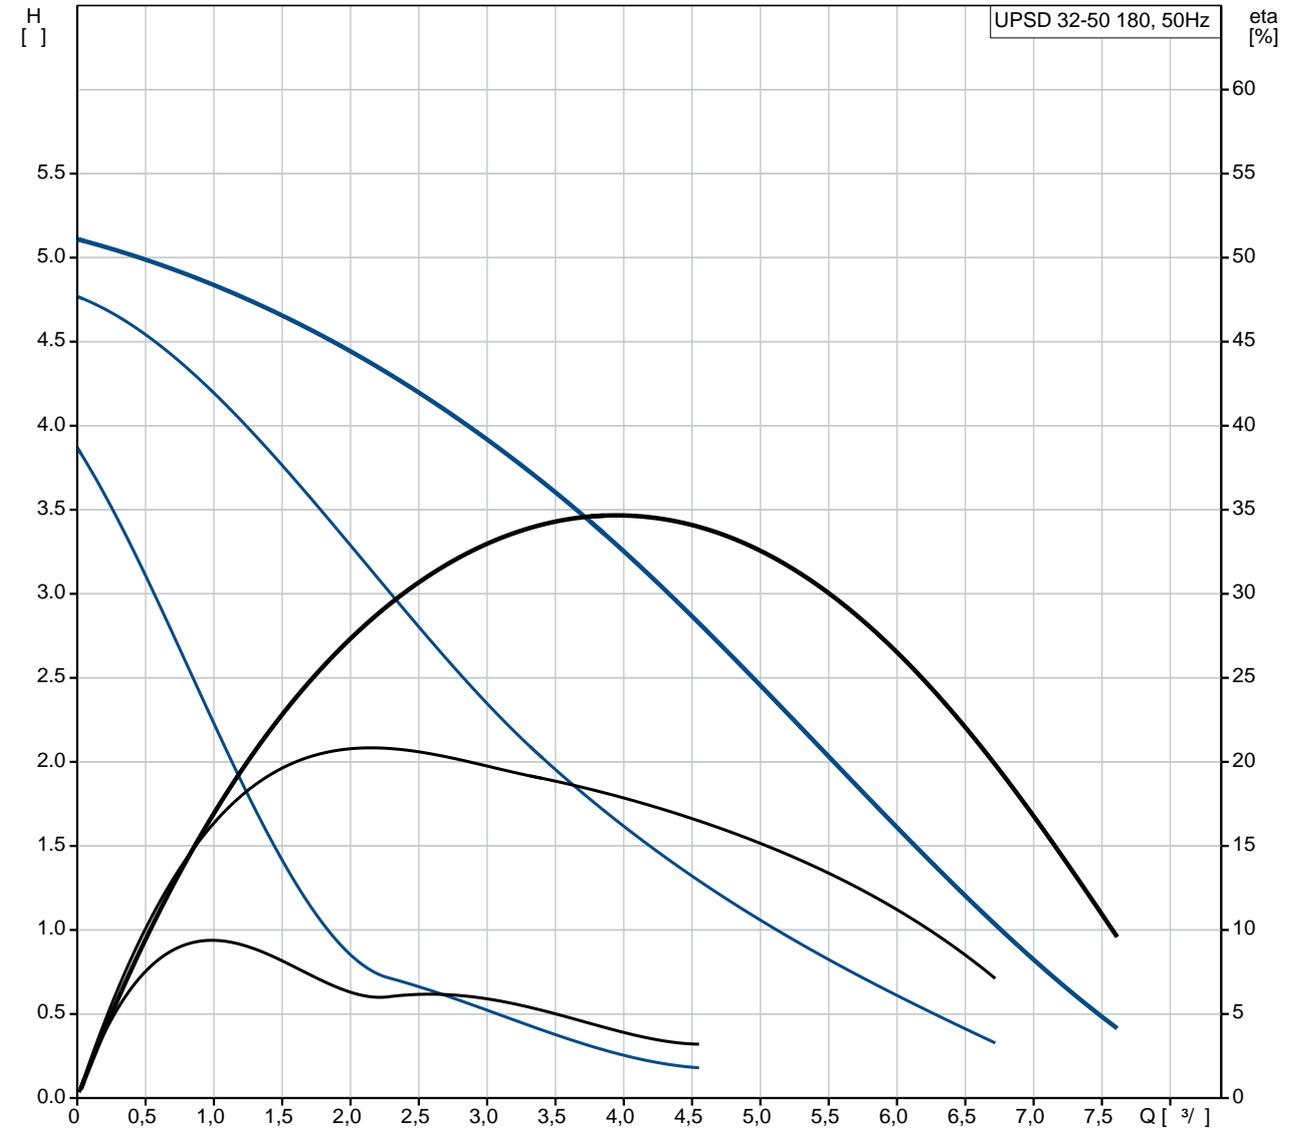


	UPSD 32-50 180
EAN	
TF	3 50 110 AAA,EAC
	EN-JL1030 ASTM 30 B , PES/PP
80 OC:	40 °C
	10 G 2 PN 10 180
	-25 .. 110 °C 60 °C 983.2 / ³
	1: 75 2: 100 105
	50 Hz 1 x 230 1: 0.32 A 2: 0.44 A 3: 0.46 A 2.5 (IEC 34-5): X2D (IEC 85): F CONTACT
	12H
	10.7 11.1 0.018 ³
C	RS 8413703000

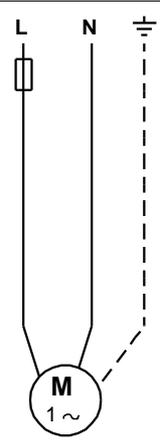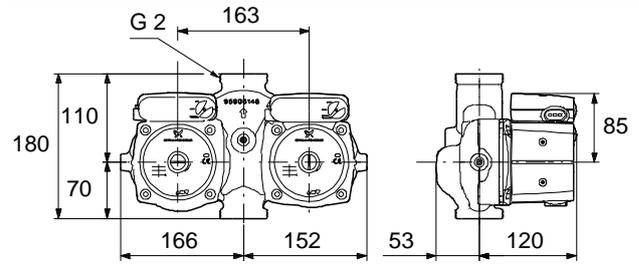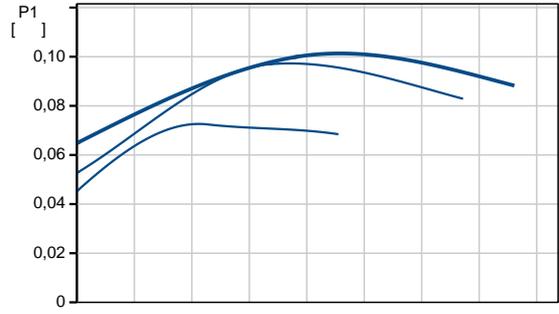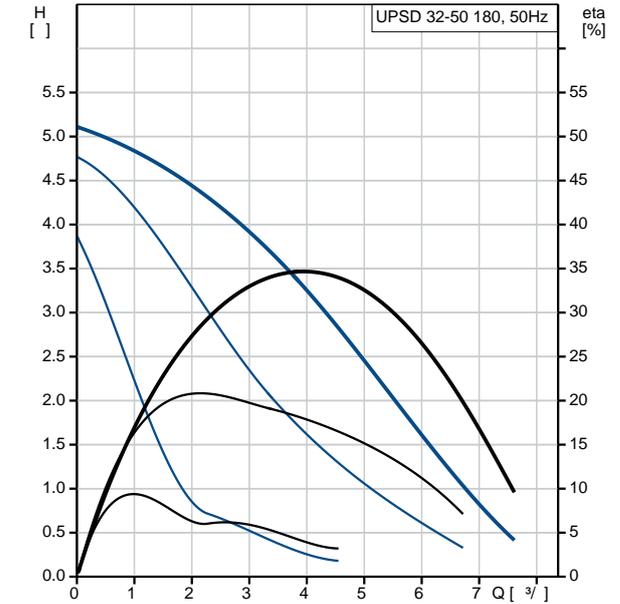

## UPSD 32-50 180 50

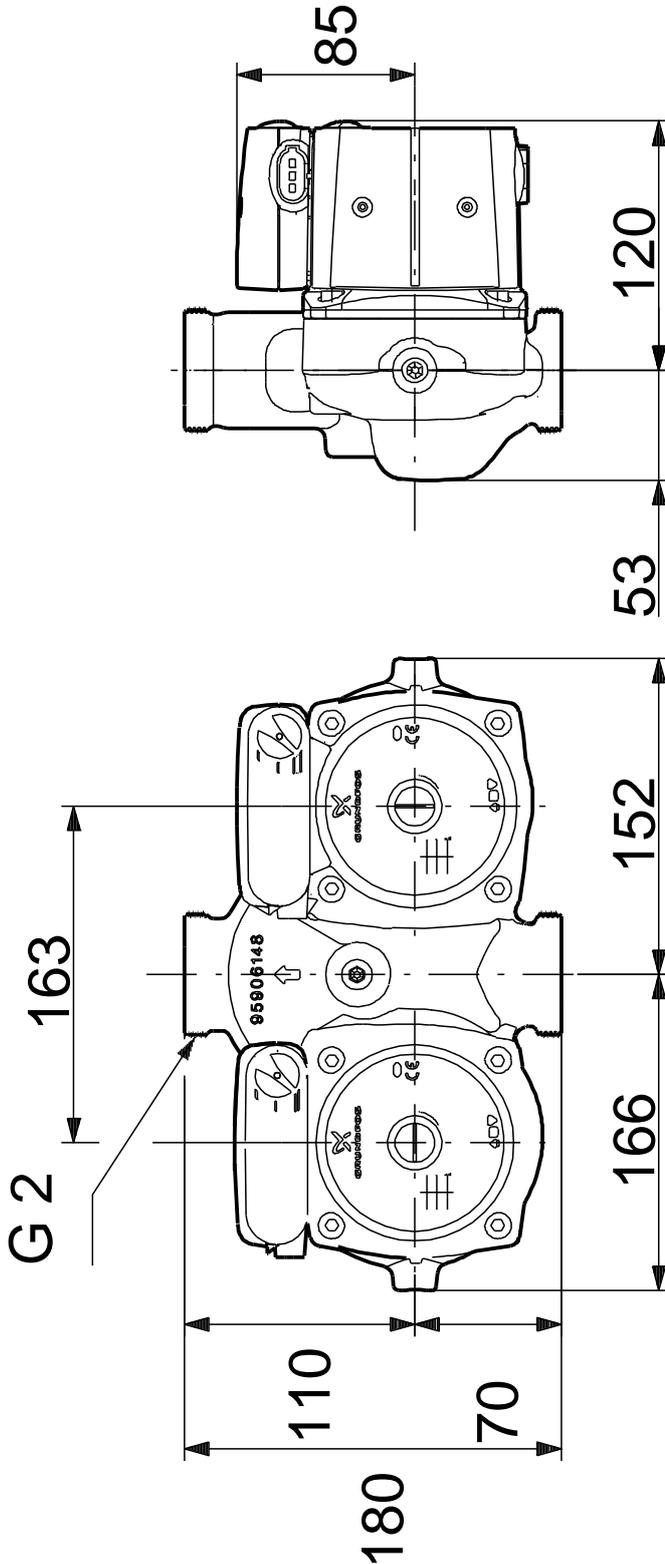

**UPSD 32-50 180 50**

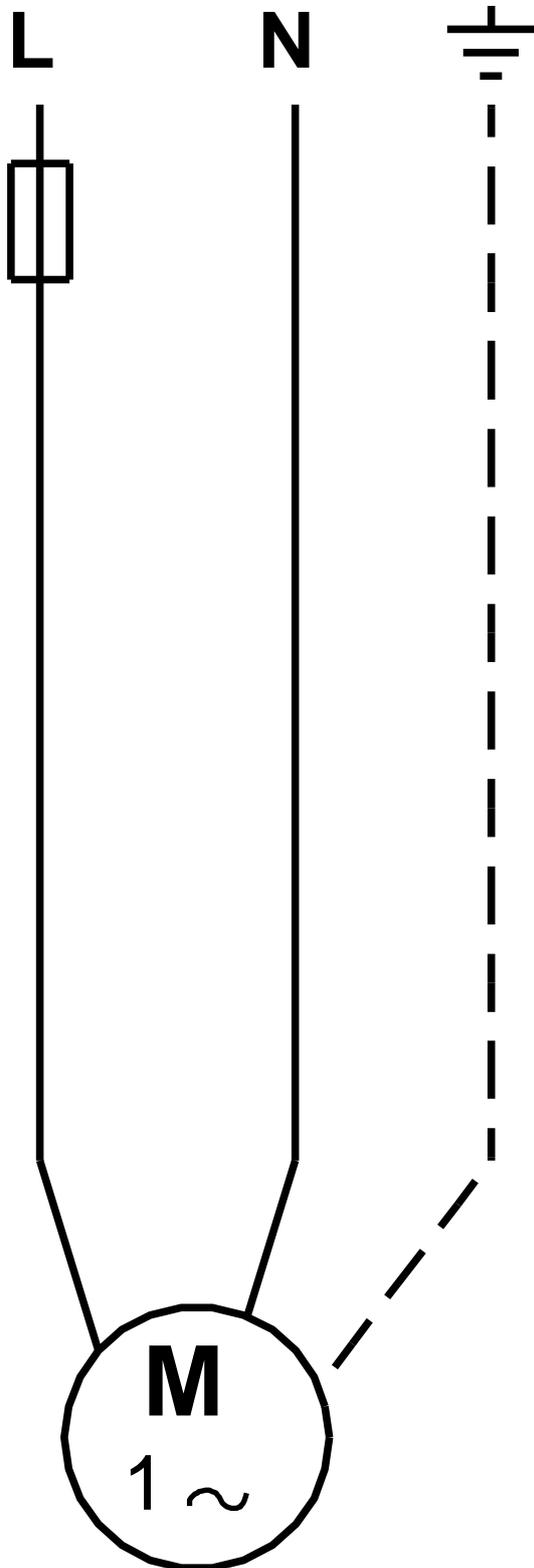

! [ ], .



Email:

(044) 402-01-11, (044) 592-22-02  
sales@delta-term.ua  
28.01.2019

: UPSD 32-50 180  
1