

1 UPSD 32-60 F



*
*
*
*
*
*
*
*

1-

: -10 .. 120 °C
: 60 °C
: 983.2 / 3

: AAA,EAC


EN-JL1040
ASTM 35 B - 40 B

DIN W.-Nr. 1.4301
AISI 304




: 0 .. 40 °C

. : 10
: : DIN
: : DN 32
: : PN 6 / PN 10
: : 220
:
1: 170
2: 180
: 190
: 50 Hz
: 1 x 230-240
1: 0.84 A
2: 0.86 A
3: 0.88 A
Cos 1: 0.88
Cos 2: 0.91
Cos : 0.94
- : 6 /400
(IEC 85): F
Enclosure class (IEC 60529): X4D
:
:
:
:
: 31.6
: 35.1
: 0.04 ³
C : RS
: 8413703000

UPSD 32-60 F 50




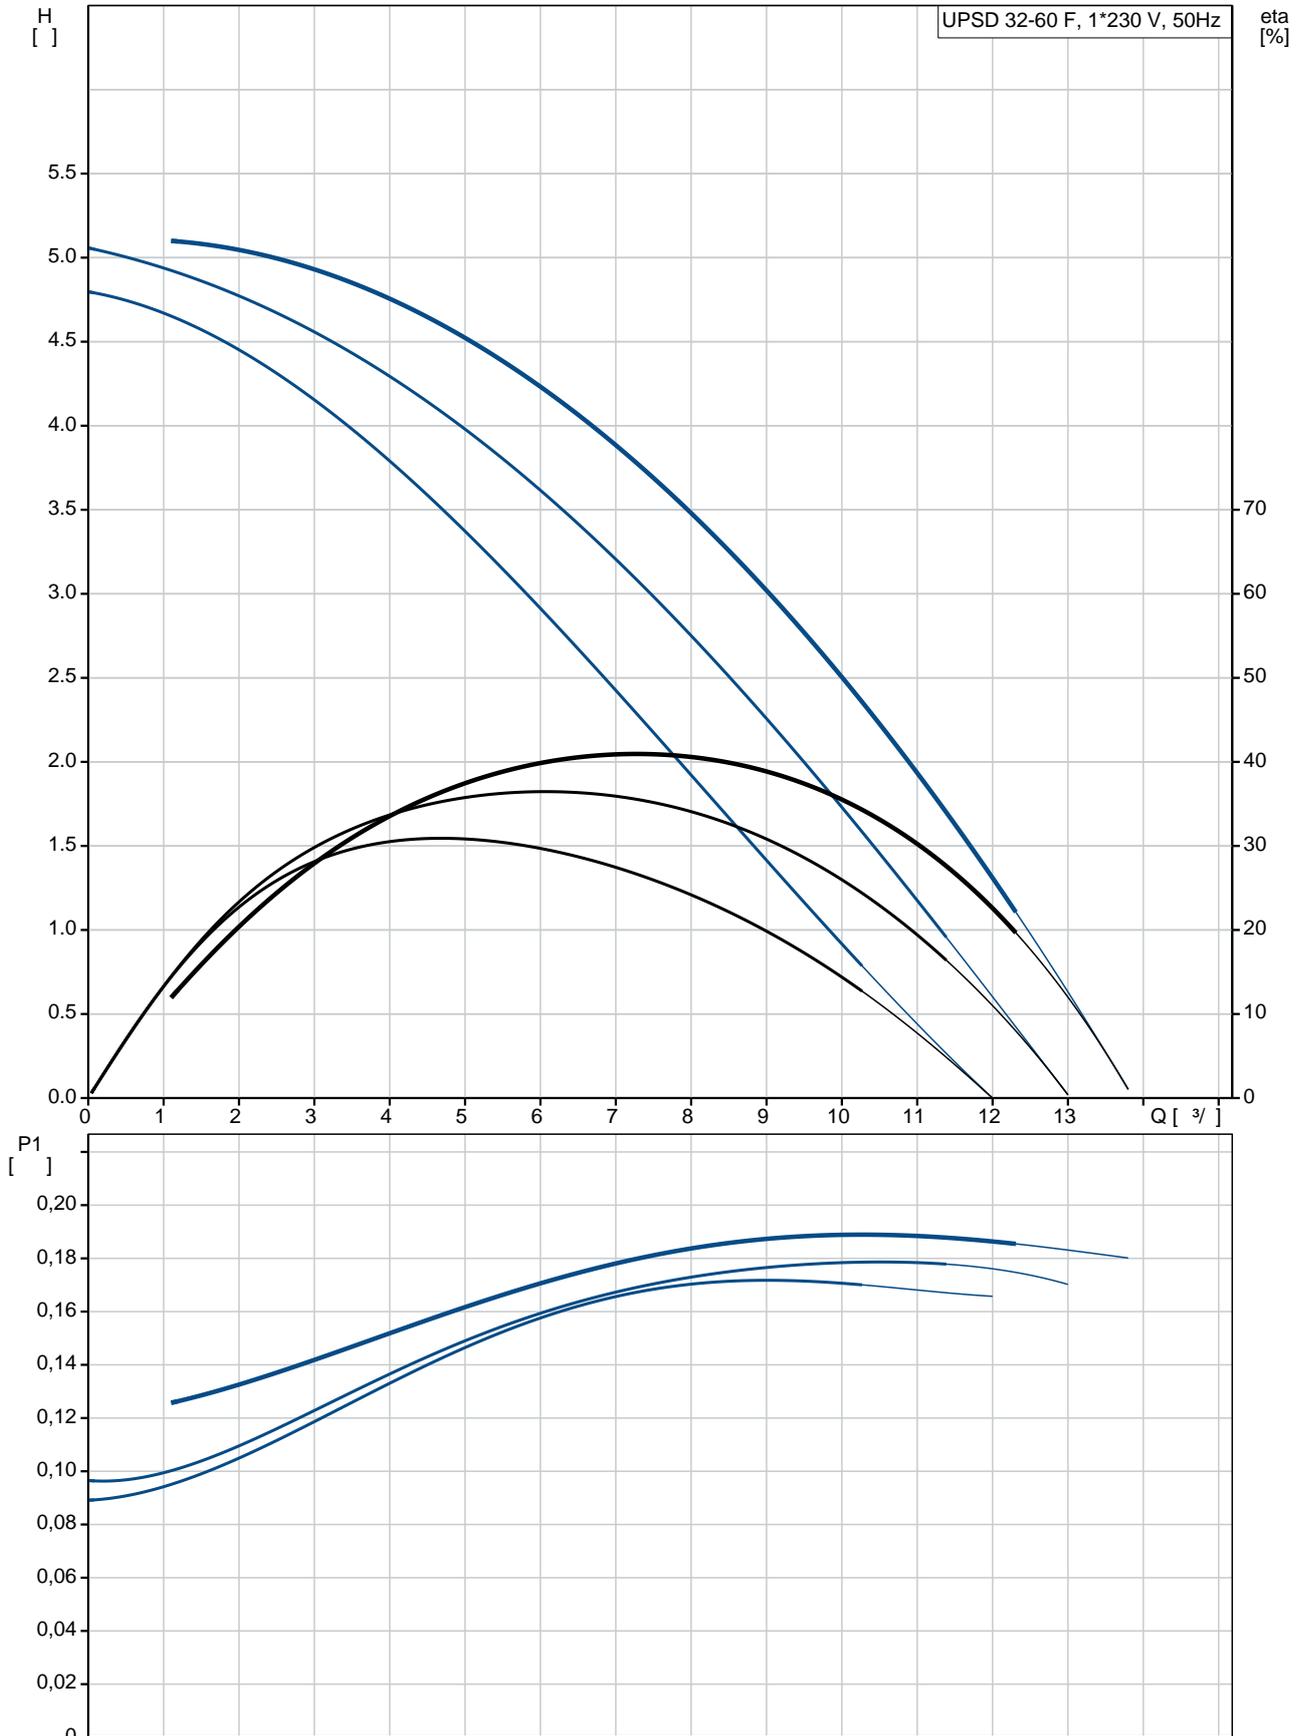


| | |
|------------------------------|----------------------|
| | UPSD 32-60 F |
| EAN | |
| | 3 |
| | 60 |
| | AAA,EAC |
| | EN-JL1040 |
| | ASTM 35 B - 40 B |
| | DIN W.-Nr. 1.4301 |
| | AISI 304 |
| | 0 .. 40 °C |
| | 10 |
| | DIN |
| | DN 32 |
| | PN 6 / PN 10 |
| | 220 |
| | -10 .. 120 °C |
| | 60 °C |
| | 983.2 / ³ |
| | 1: 170 |
| | 2: 180 |
| | 190 |
| | 50 Hz |
| | 1 x 230-240 |
| | 1: 0.84 A |
| | 2: 0.86 A |
| | 3: 0.88 A |
| Cos | 1: 0.88 |
| Cos | 2: 0.91 |
| Cos | 0.94 |
| | 6 /400 |
| (IEC 85): | F |
| Enclosure class (IEC 60529): | X4D |
| | CONTACT |
| | 12H |
| | 31.6 |
| | 35.1 |
| | 0.04 ³ |
| C | RS |
| | 8413703000 |

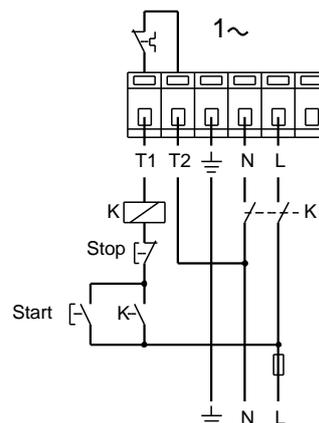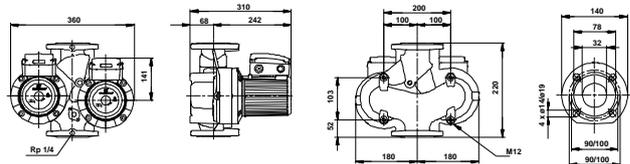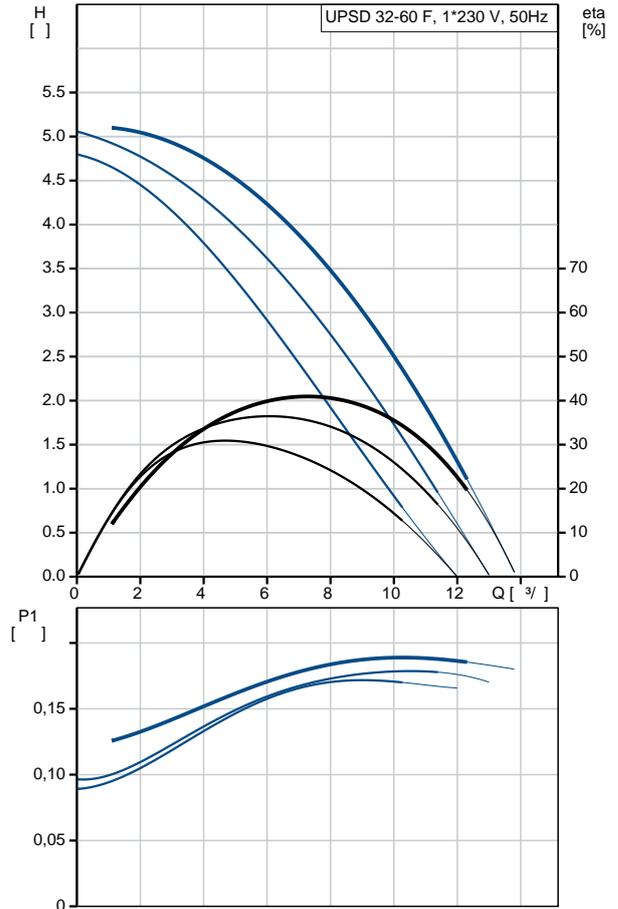


UPSD 32-60 F 50

UPSD 32-60 F 50

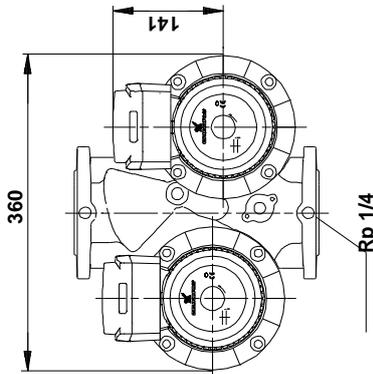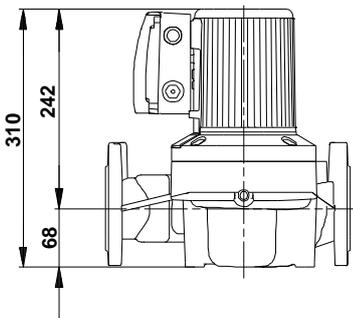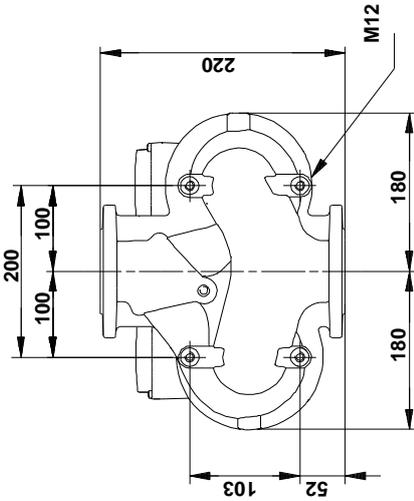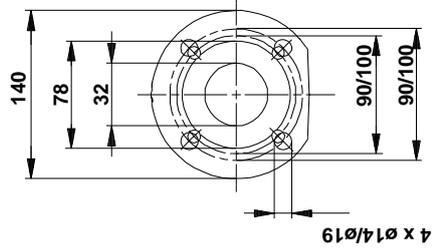

UPSD 32-60 F 50

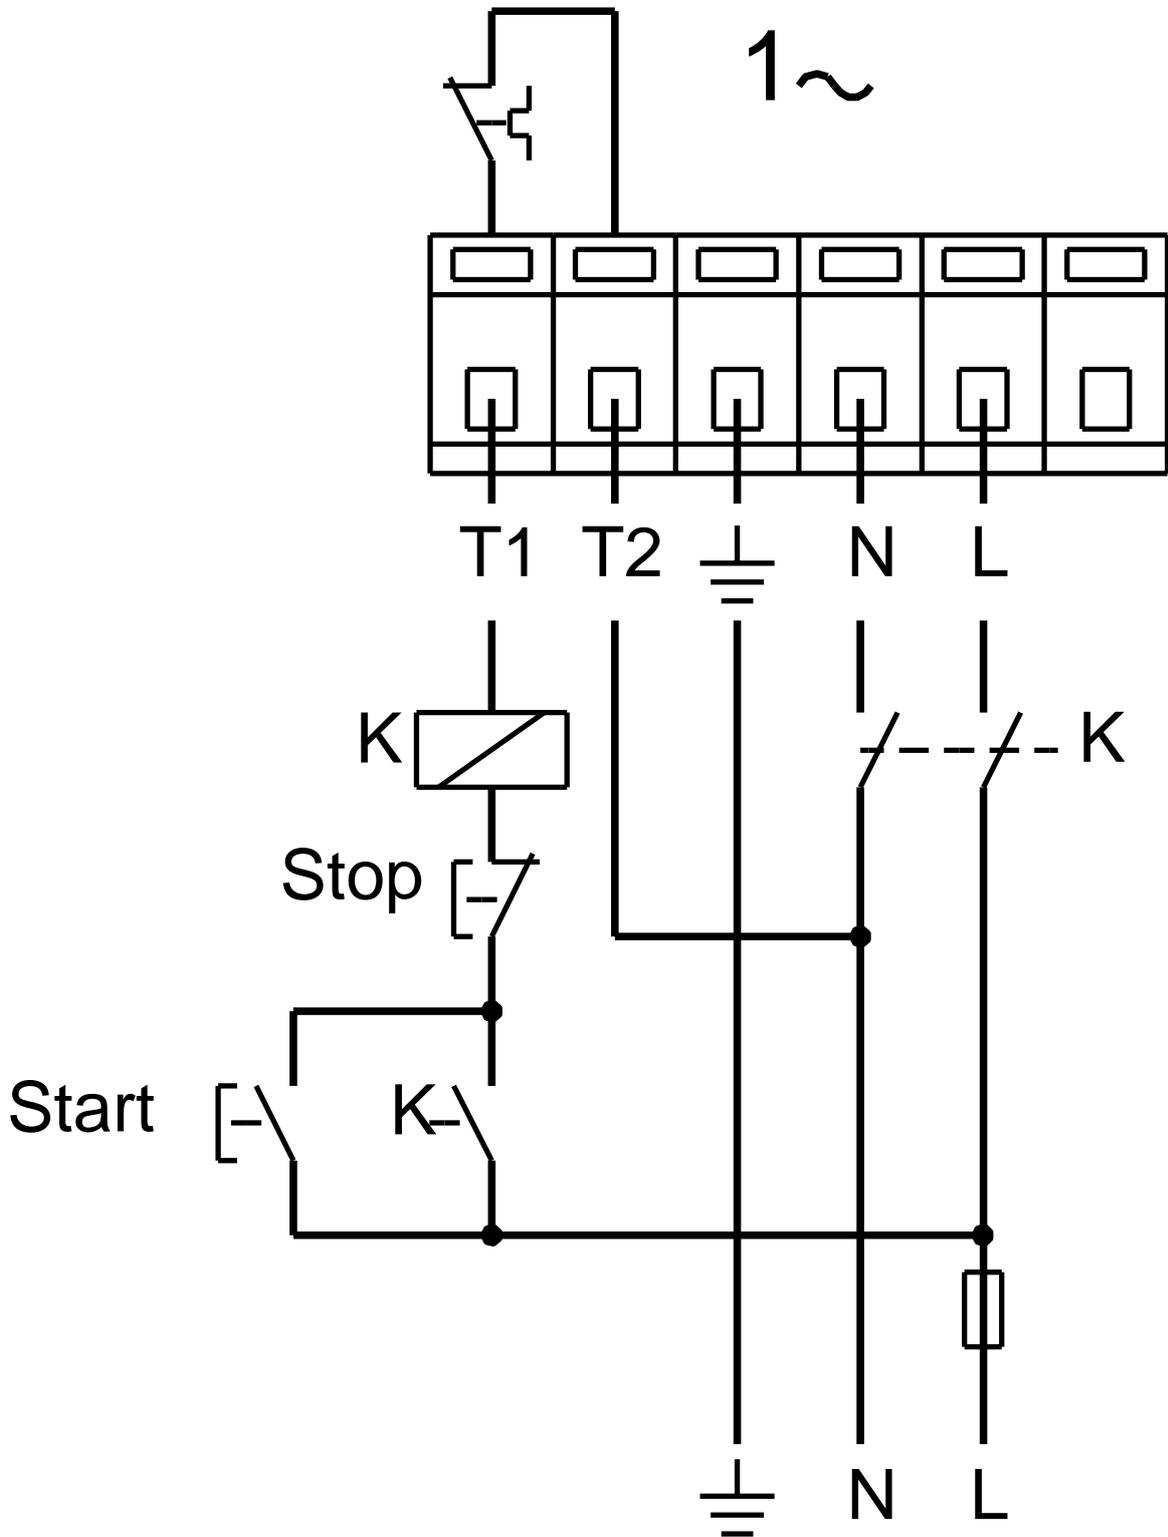

! [], .