














**UPSD 40-120 F 50**

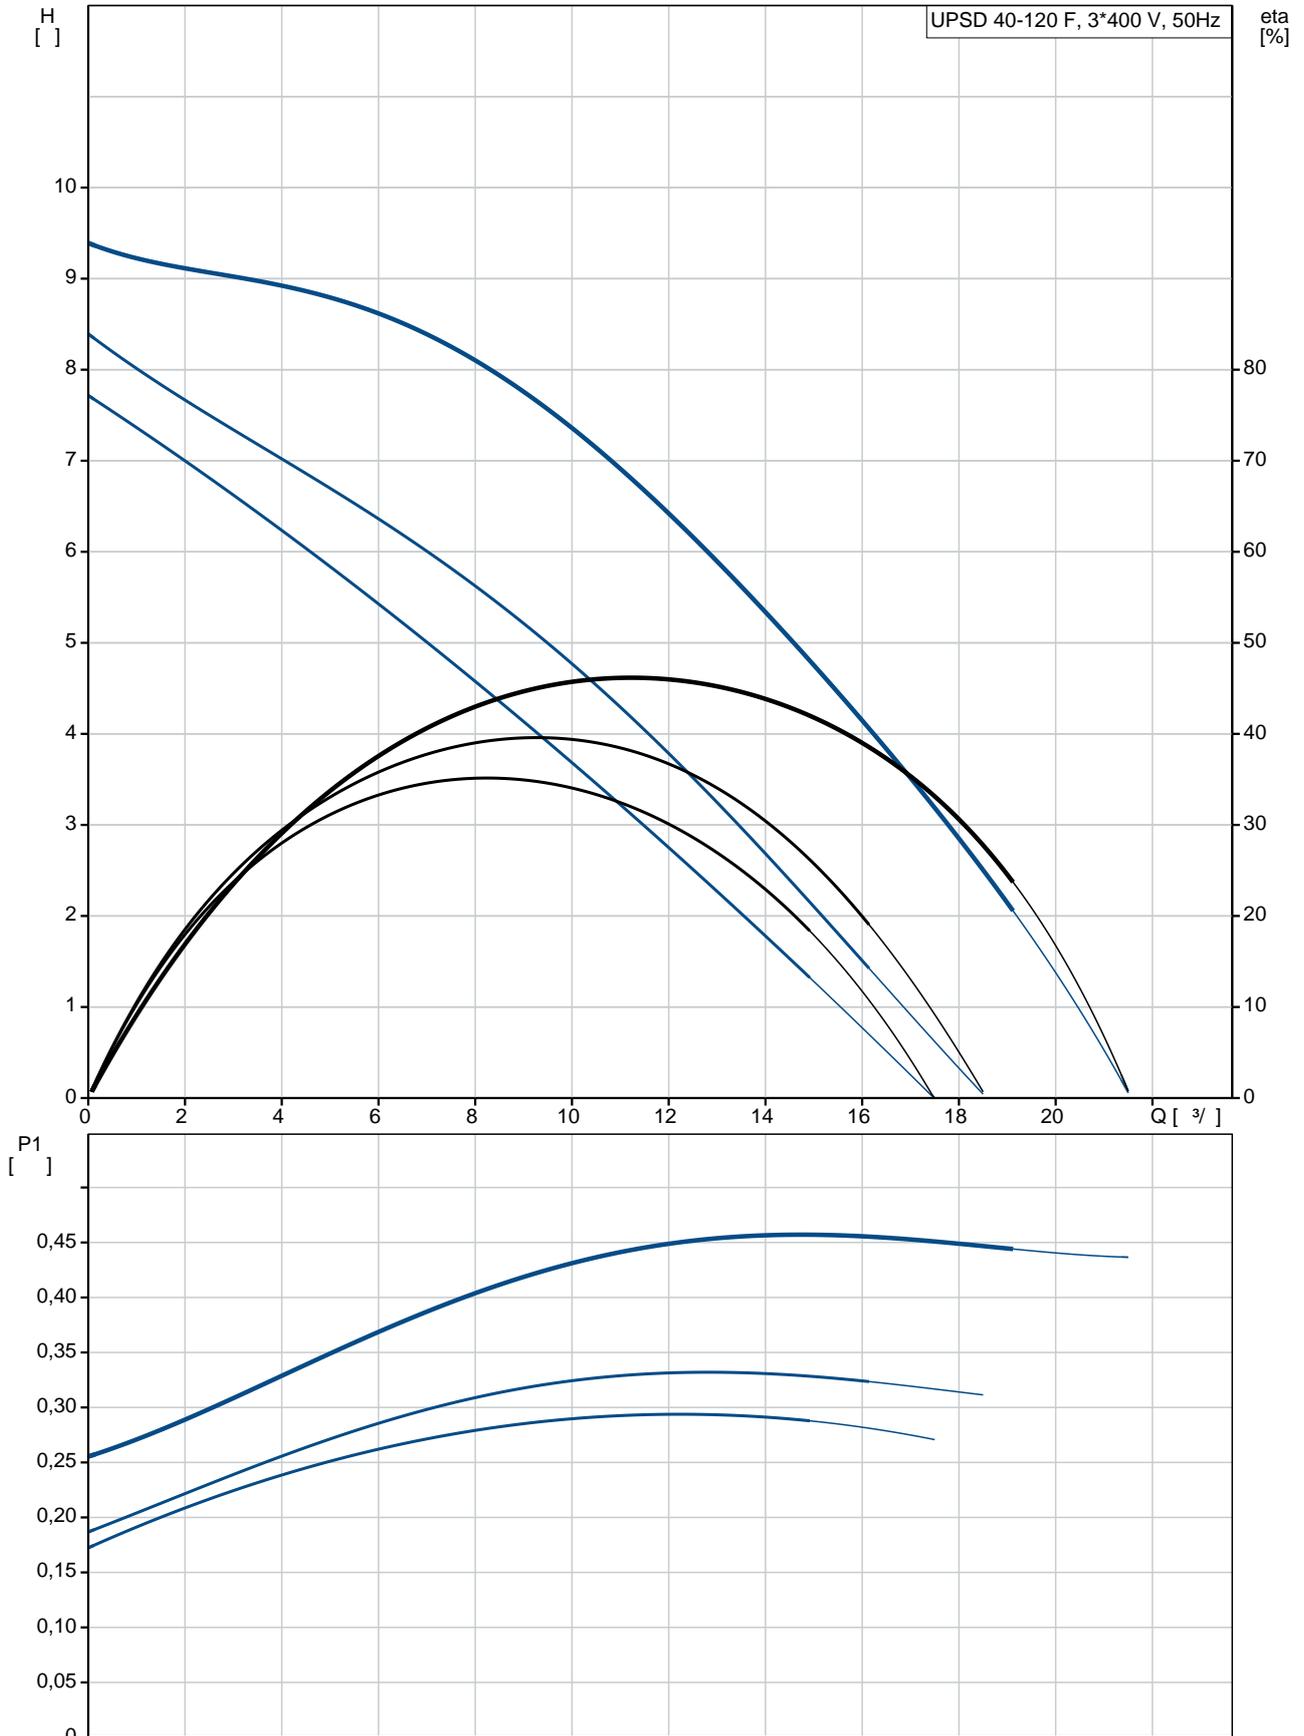


	UPSD 40-120 F
EAN	
	3
	120
	AAA,EAC
	EN-JL1040
	ASTM 35 B - 40 B
	DIN W.-Nr. 1.4301
	AISI 304
	0 .. 40 °C
	10
	DIN
	DN 40
	PN 6 / PN 10
	250
	-10 .. 120 °C
	60 °C
	983.2 / ³
	1: 290
	2: 330
	460
	50 Hz
	3 x 400-415
	1: 0.49 A
	2: 0.56 A
	3: 0.92 A
Cos	1: 0.85
Cos	2: 0.85
Cos	0.72
	(IEC 85): F
Enclosure class (IEC 60529):	X4D
	CONTACT
	12H
	33.5
	38.1
	0.04 ³
Danish VVS No.:	381715041
C	RS
	8413703000

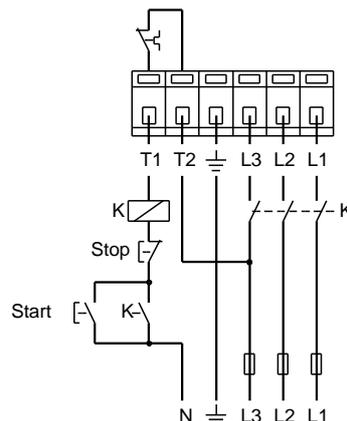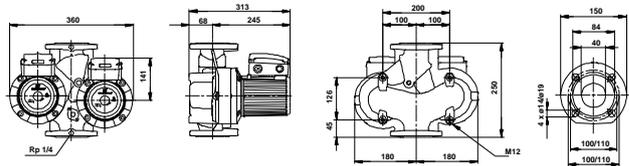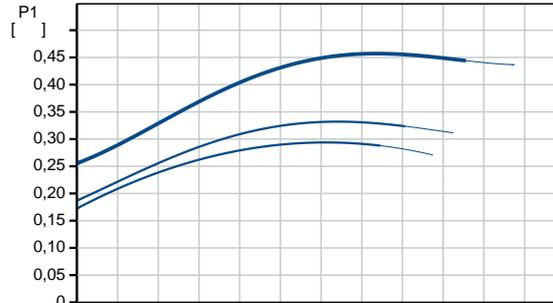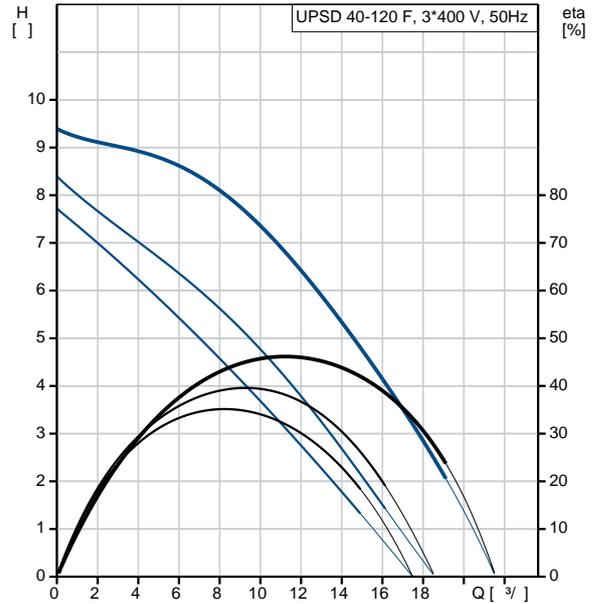

## UPSD 40-120 F 50

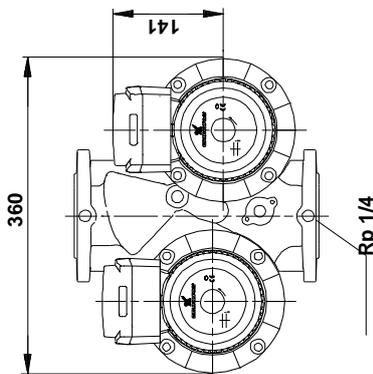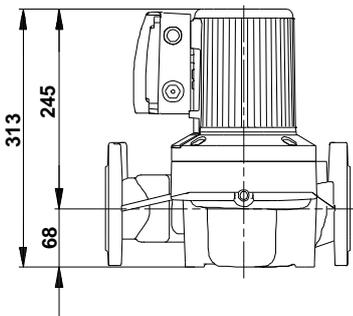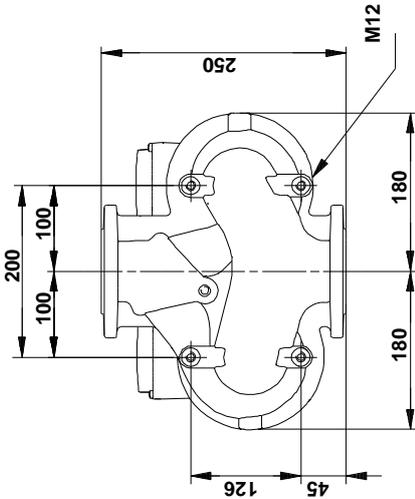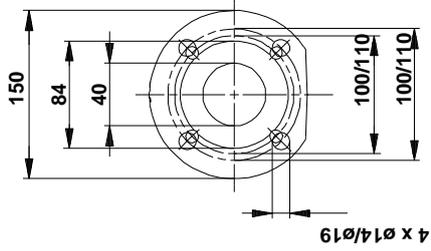

**UPSD 40-120 F 50**

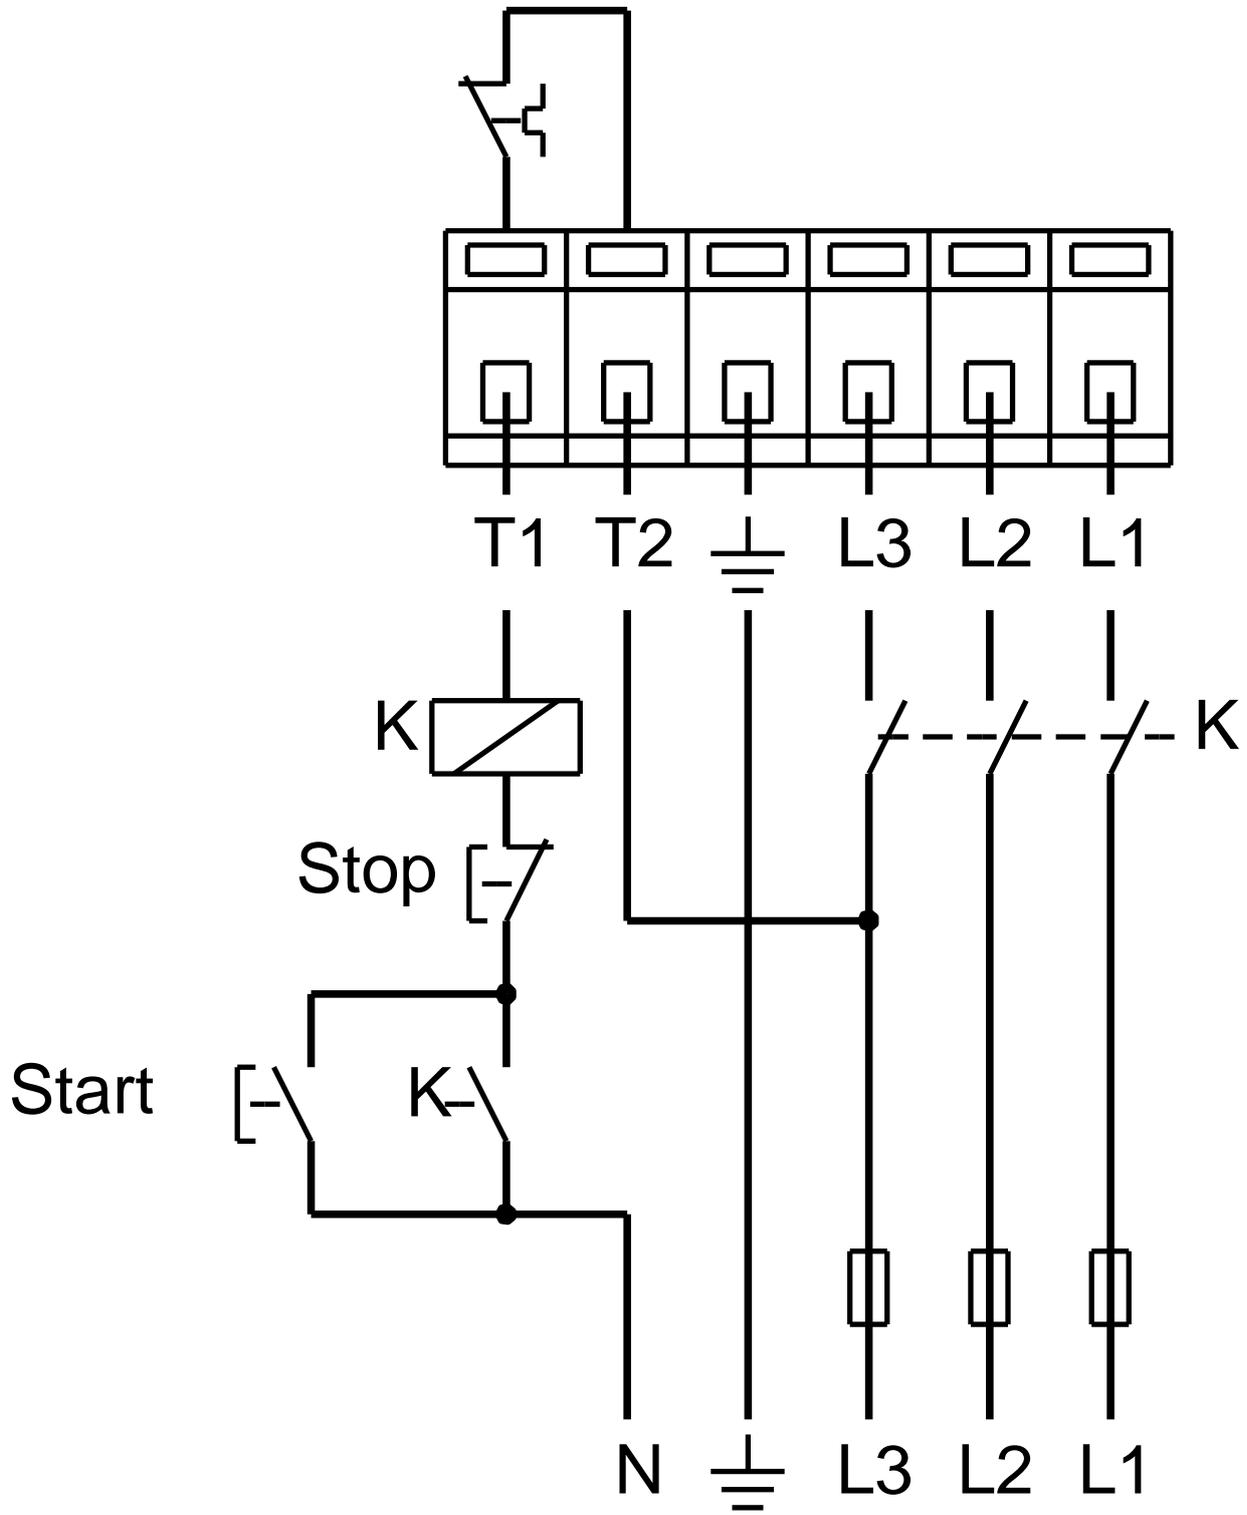

! [ ], .

: UPSD 40-120 F  
1

- :

:

: