

1 SP 30-6R



: 13CV1906

, EN 1.4539 (AISI 904L),

MS40005.5

40 °C.

-
-
-
-
-
-
-
-

SP



Grundfos

Grundfos



(y)

-1 ().

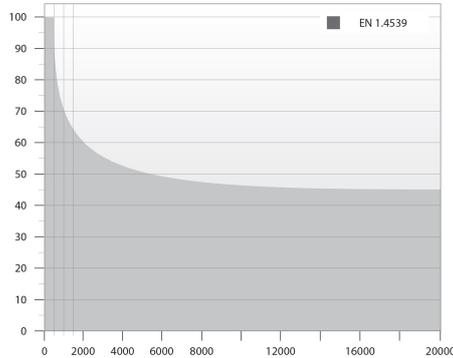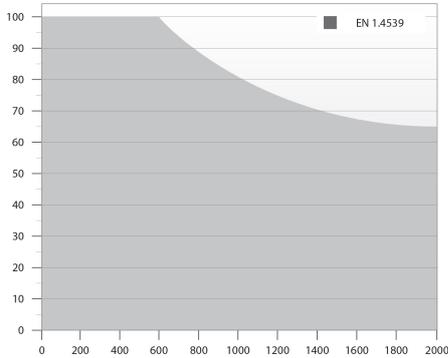

Grundfos

90 °C.

(NEMA)

SiC/SiC.

: 40 °C
 . t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / ³
 : 2900 /
 : 30 ³/
 : 46
 : SIC/SIC
 : CE,EAC
 - : ISO9906:2012 3B
 : T40

EN 1.4539
 AISI ASTM A240

EN 1.4539
 AISI 904L

DIN W.-Nr. 1.4539
AISI 904 L

RP3
4 inch

MS4000
- P2: 5.5
(2), : 5.5


50 Hz
3 x 380-400-415
13.0-13.0-13.4 A
480-530-550 %
Cos - : 0.85-0.81-0.76
2850-2860-2870 /

(IEC 34-5): IP68
(IEC 85): F
79195611



MEI : 0.50

ErP : EuP /
42.8
(): 68
0.2³

13CV1906 SP 30-6R 50

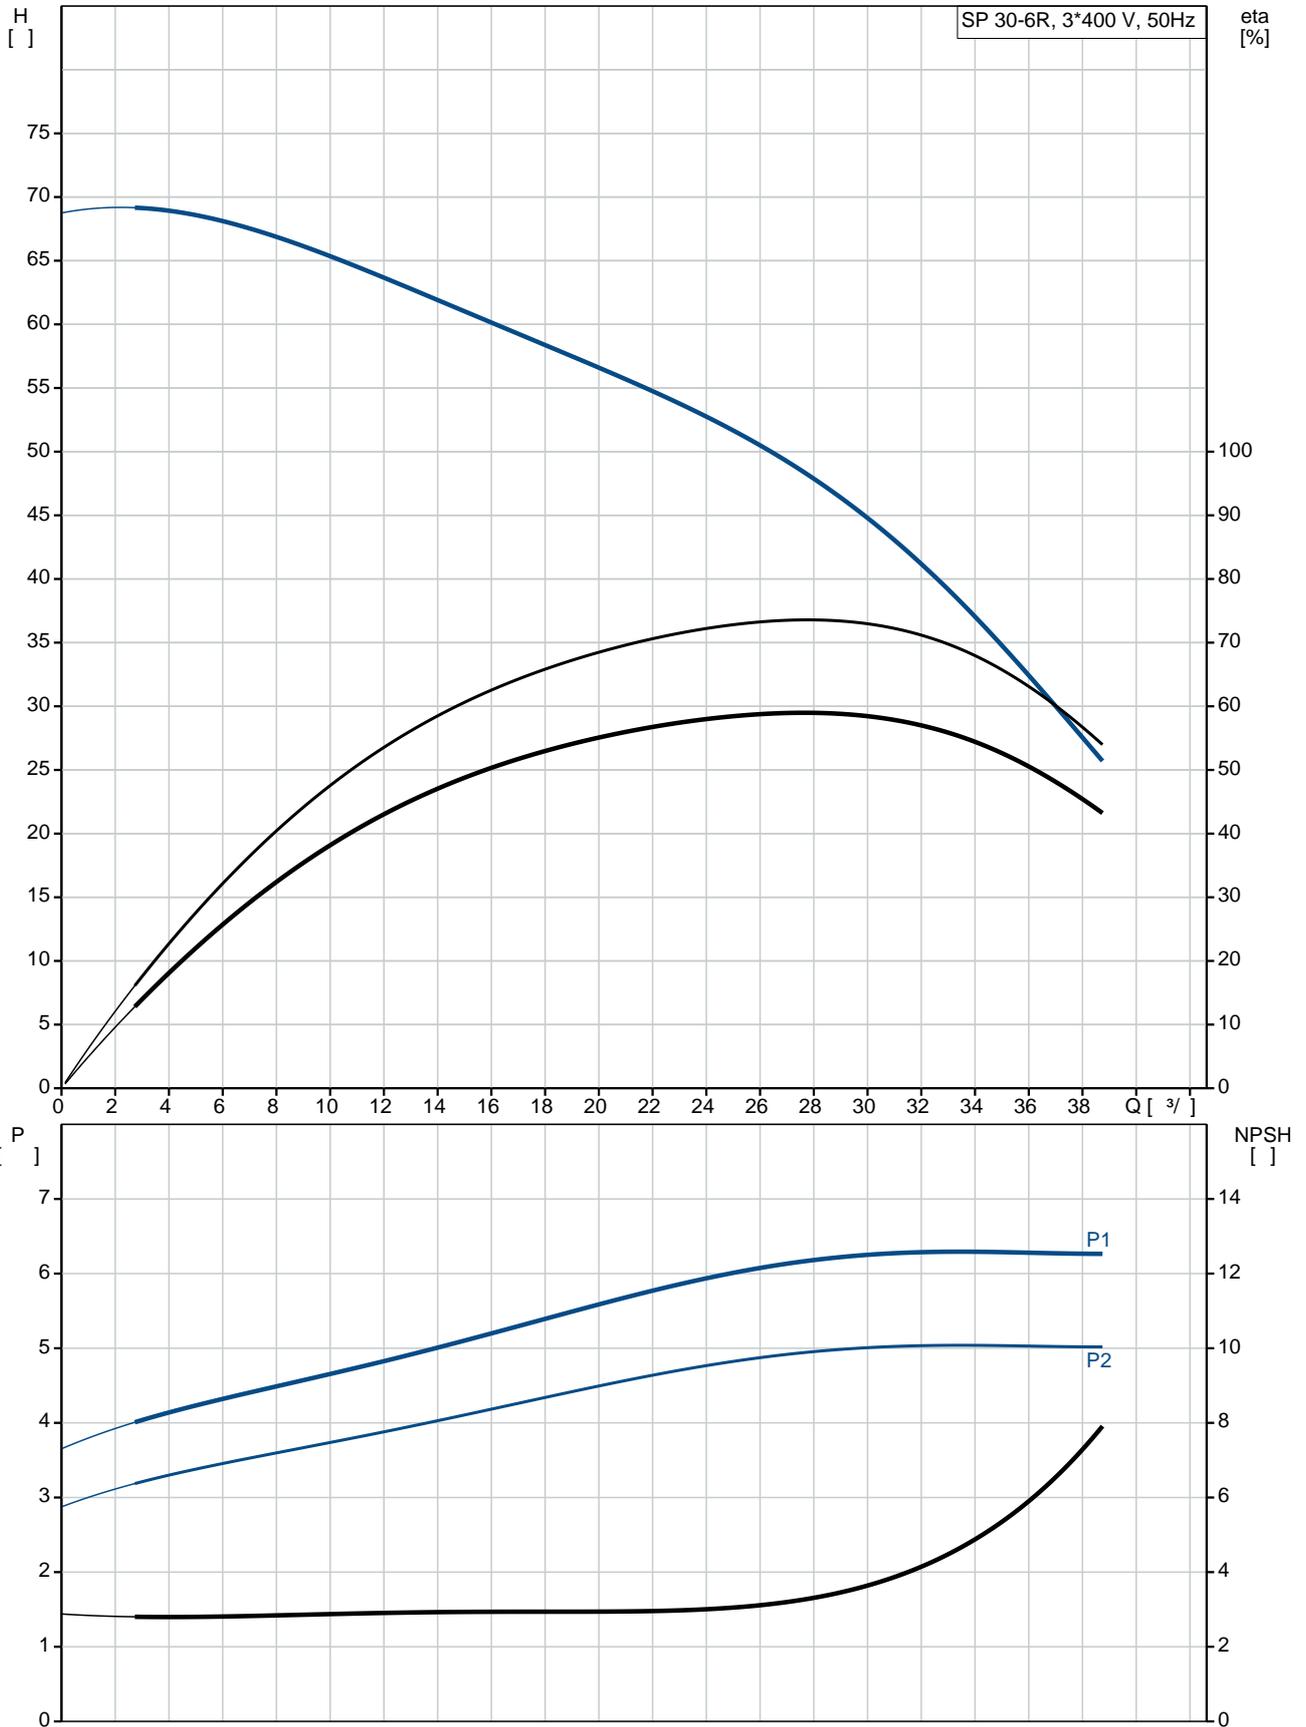

SP 30-6R	
13CV1906	
EAN	5700391456053
	5700391456053
2900 /	
30 ³ /	
46	
6	
NONE	
SIC/SIC	
CE,EAC	
ISO9906:2012 3B	
B	
YES	
T40	
EN 1.4539	
AISI ASTM A240	
EN 1.4539	
AISI 904L	
DIN W.-Nr. 1.4539	
AISI 904 L	
RP3	
4 inch	
40 °C	
t	0,15 / 40 °C
20 °C	
998.2 / ³	
MS4000	
GRUNDFOS	
- P2: 5.5	
(2),	5.5
50 Hz	
3 x 380-400-415	
13.0-13.0-13.4 A	
480-530-550 %	
Cos	0.85-0.81-0.76
2850-2860-2870 /	
(IEC 34-5): IP68	
(IEC 85): F	
79195611	

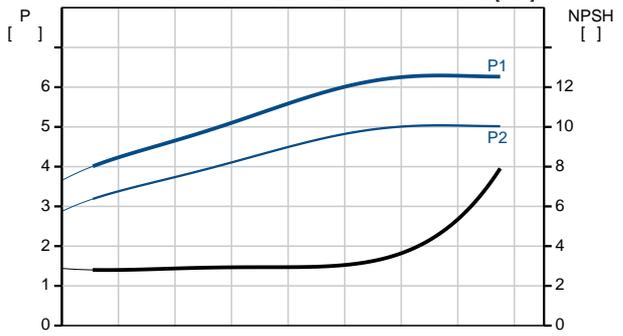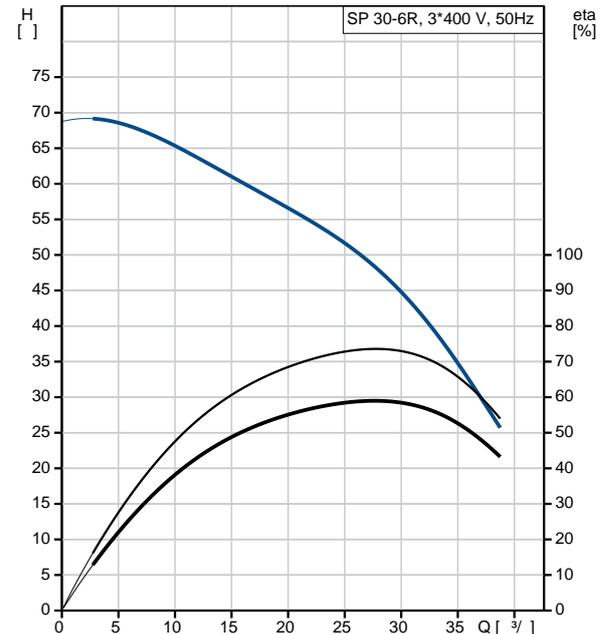




Email:


9/25/2019
(044) 402-01-11
sales@delta-term.ua
25.09.2019

:	
MEI :	0.50
ErP :	EuP / .
:	42.8
():	68
:	0.2 ³


13CV1906 SP 30-6R 50

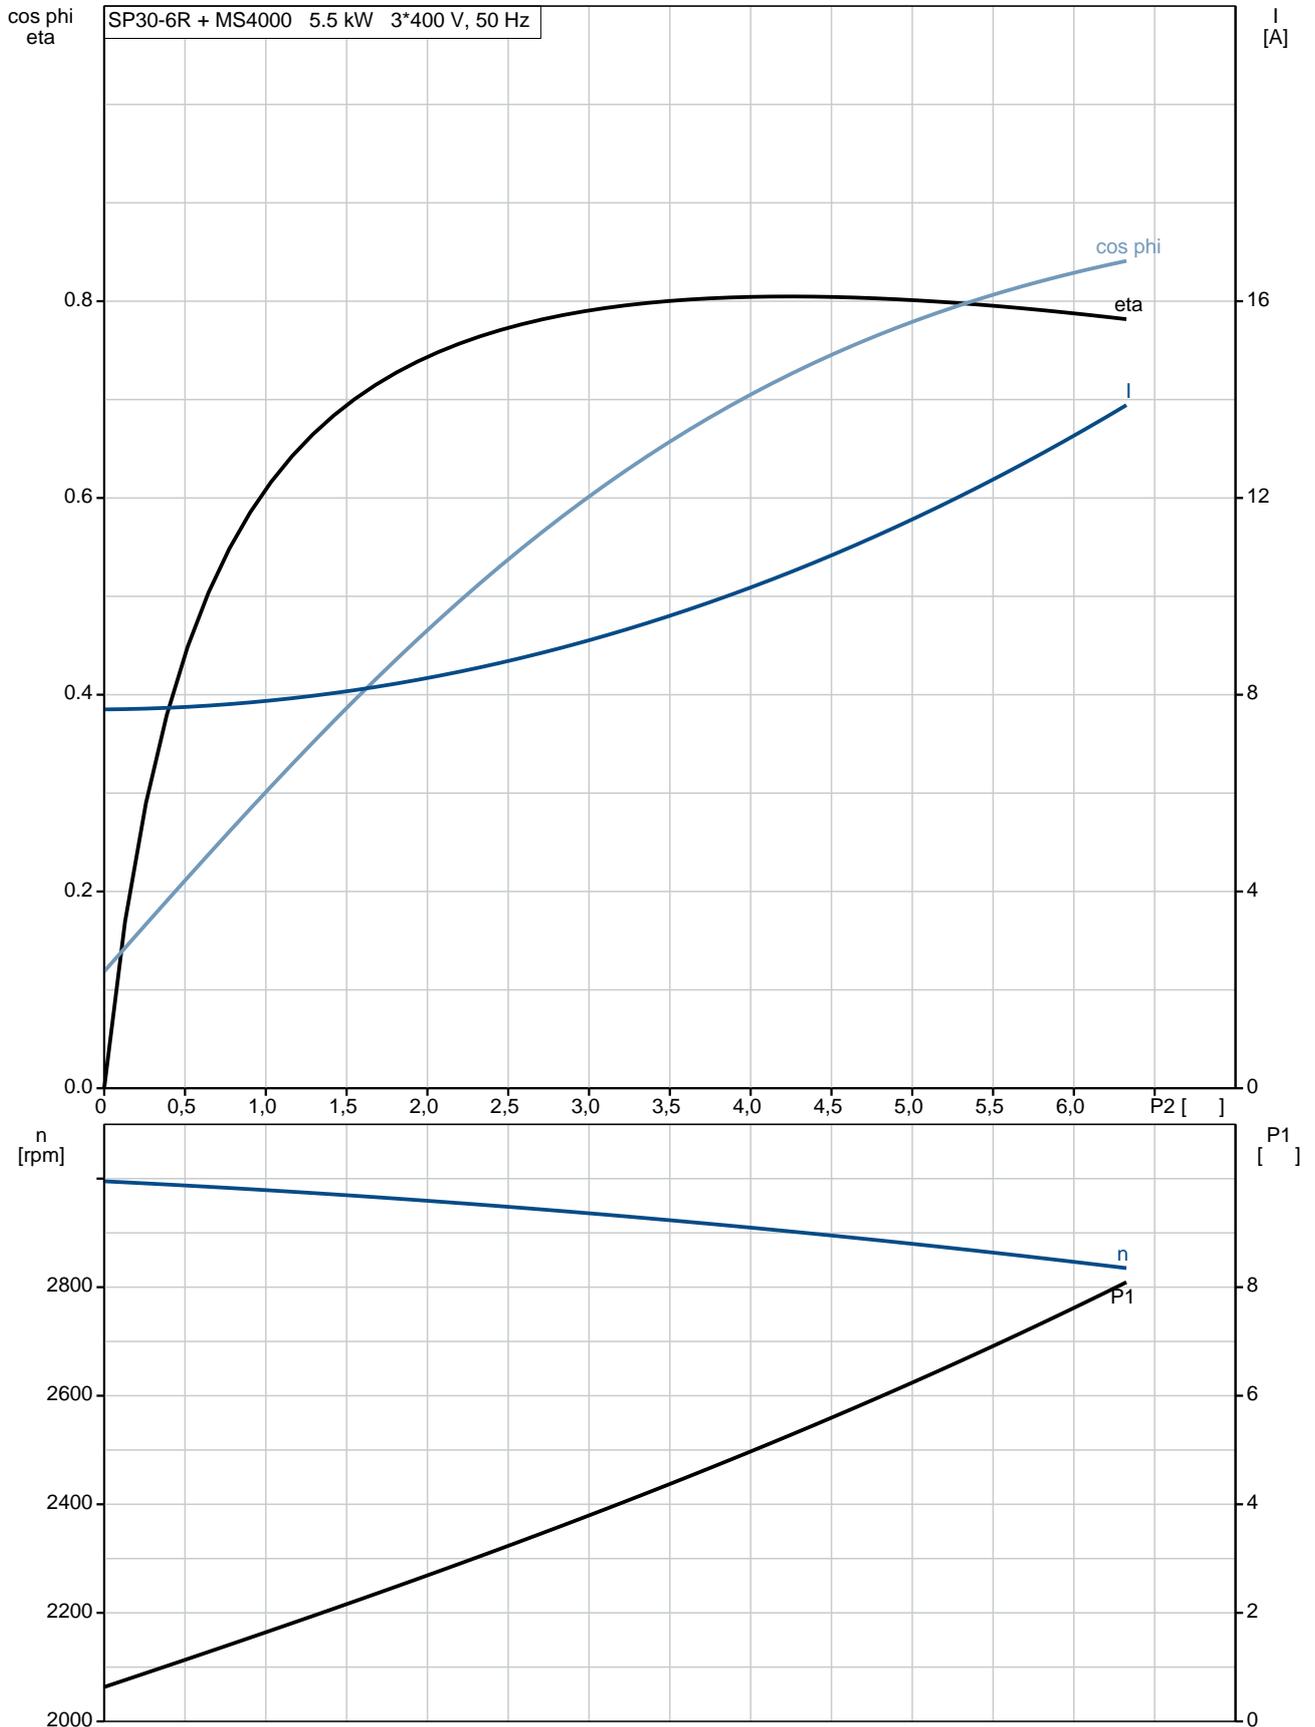

13CV1906 SP 30-6R 50

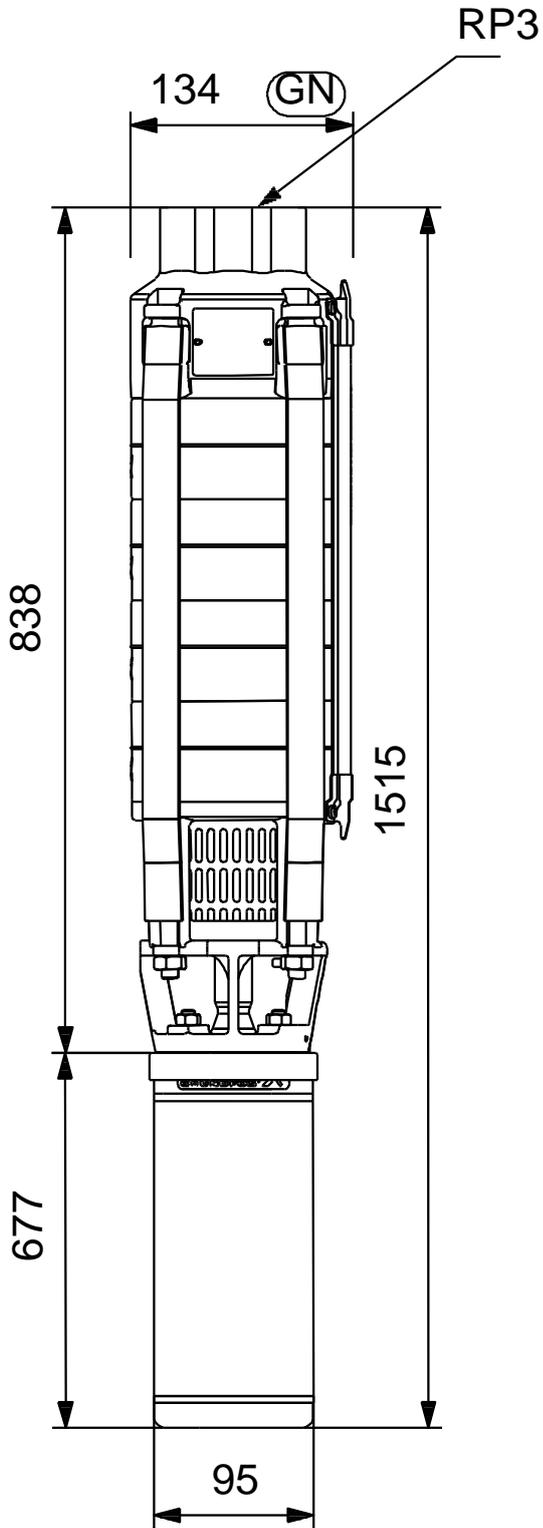

13CV1906 SP 30-6R 50

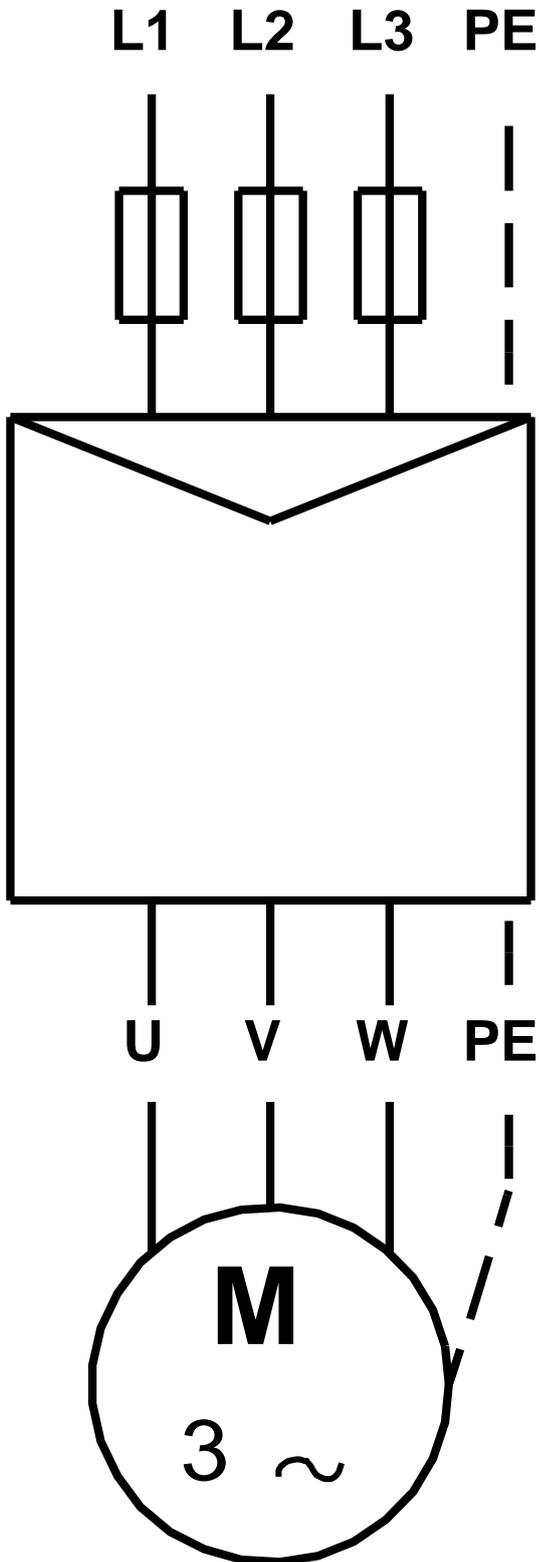

! [], .