

1 CR 10-6 A-FJ-A-E-HQQE



: 96501215

(" - ")


DIN-JIS.

3-


(CED). CED –

- 1)
- 2)
- 3)
- 4)

18-22
– NCS 9000/RAL 9005.

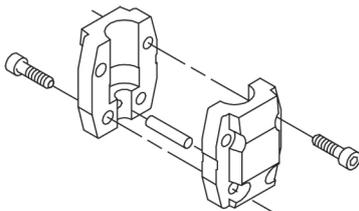

1/2"

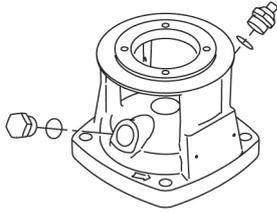

•
•


(SiC)

(SiC)


EPDM

: EPDM (

) EPDM



PEEK,

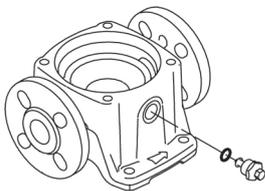

IEC DIN

(FT).

IEC 60034-7: IM B 14 (Code I) / IM 3601 (Code II).

IEC 60034.
IE3

IEC 60034-30-1.

(1/1).

Grundfos CUE
Grundfos Product Center.

NONE

-20 .. 120 °C
20 °C
998.2 / 3

2899 /

10 3/
48.3

HQQE
CE, EAC, ACS
ISO9906:2012 3B

EN/DIN: EN 1561 EN-GJL-200
AISI/ASTM: ASTM A48-25B

EN/DIN: EN 1.4301
AISI/ASTM: AISI 304
SIC

60 °C

16
- : 16 / 120 °C
16 / -20 °C

DIN / JIS
DN 40
1 1/2 inch

DN 40
PN 25
300 lb
FT115

IEC
90LC
IE3


- P2: 2.2
(2), : 2.2

50 Hz
3 x 380-415D
4.45 A
850-950 %




Cos : 0.89-0.87

2890-2910 /
IE3 85,9%

96501215 CR 10-6 A-FJ-A-E-HQQE 50

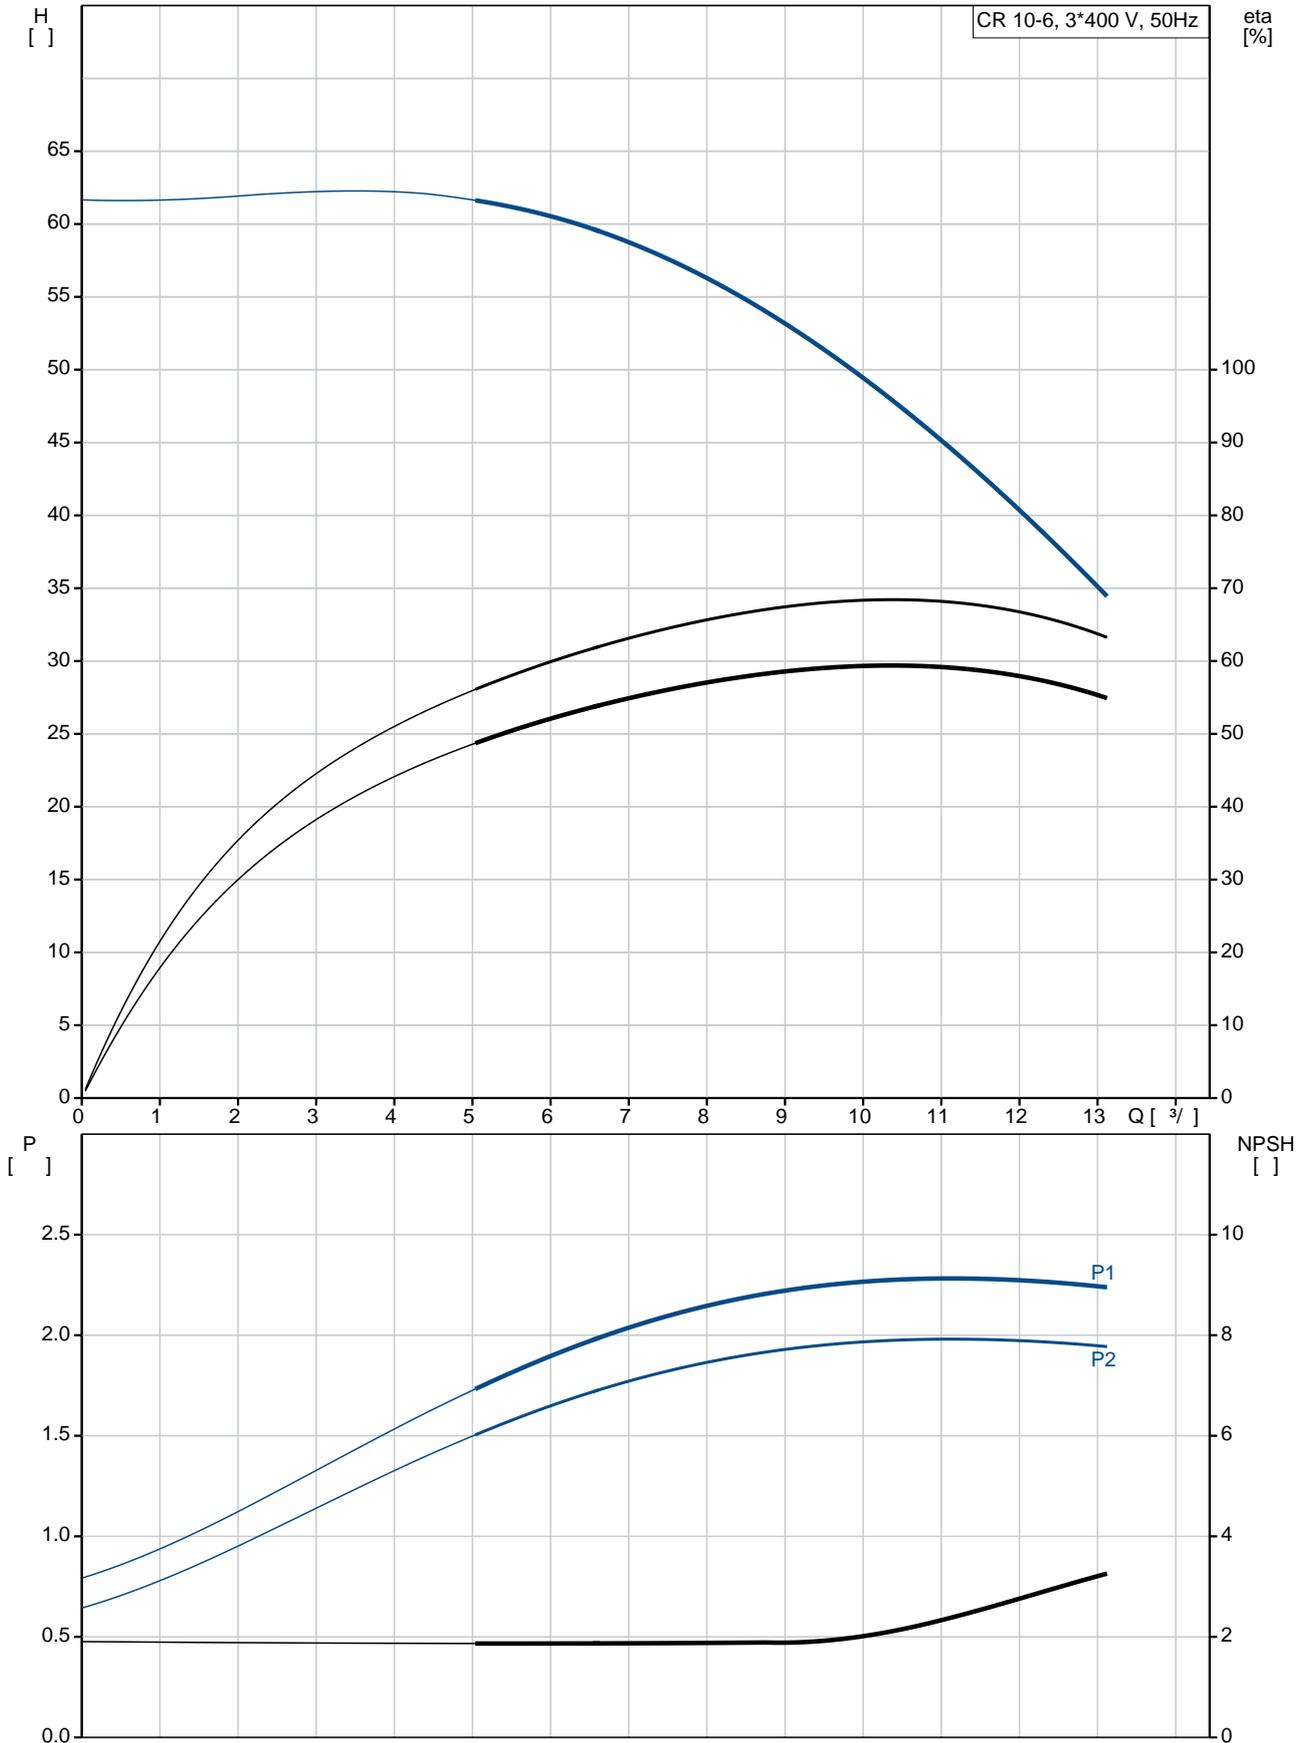


	CR 10-6
	A-FJ-A-E-HQQE
	96501215
EAN	5700396217659
	2899 /
	10 ³ /
	48.3
Head max:	61.2
	6
	6
	0
Low NPSH:	N
	HQQE
	CE, EAC, ACS
	ISO9906:2012 3B
	A
	A
	EN/DIN: EN 1561 EN-GJL-200
, AISI/ASTM:	ASTM A48-25B
	EN/DIN: EN 1.4301
, AISI/ASTM:	AISI 304
	A
	E
	SIC
	60 °C
	16
	16 / 120 °C
	16 / -20 °C
	DIN / JIS
	DN 40
	1 1/2 inch
	DN 40
	PN 25
	300 lb
	FT115
	FJ
	-20 .. 120 °C
	20 °C
	998.2 / ³
	IEC
	90LC
	IE3
- P2:	2.2

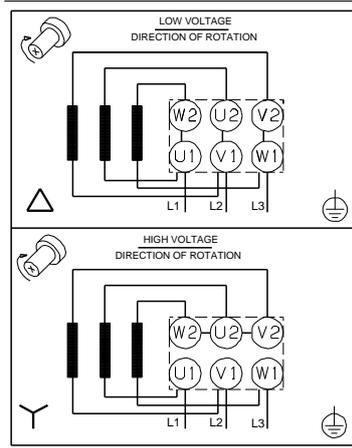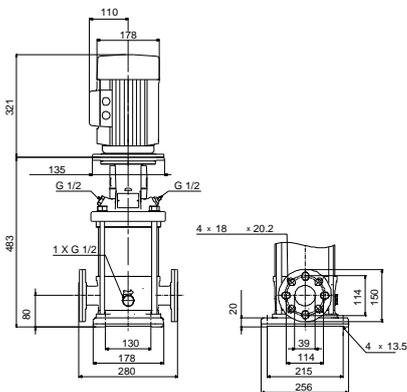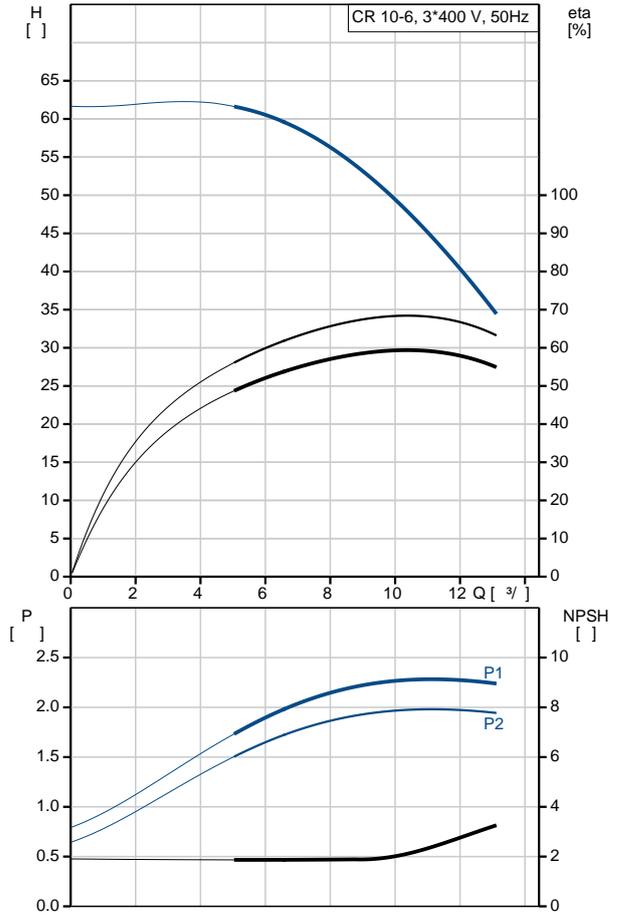

(2),	:	2.2
	:	50 Hz
	:	3 x 380-415D
	:	4.45 A
	:	850-950 %
Cos -	:	0.89-0.87
	:	2890-2910 /
	:	IE3 85,9%
	:	85.9 %
	:	3/4 86.8 %
1/2	:	86.0 %
	:	2
(IEC 34-5):	:	55 Dust/Jetting
(IEC 85):	:	F
	:	.
	:	85U15908
	:	NONE
	:	
MEI :	:	0.70
	:	54
	:	57
	:	0.104 ³
C	:	RU
	:	8413707500

96501215 CR 10-6 A-FJ-A-E-HQQE 50

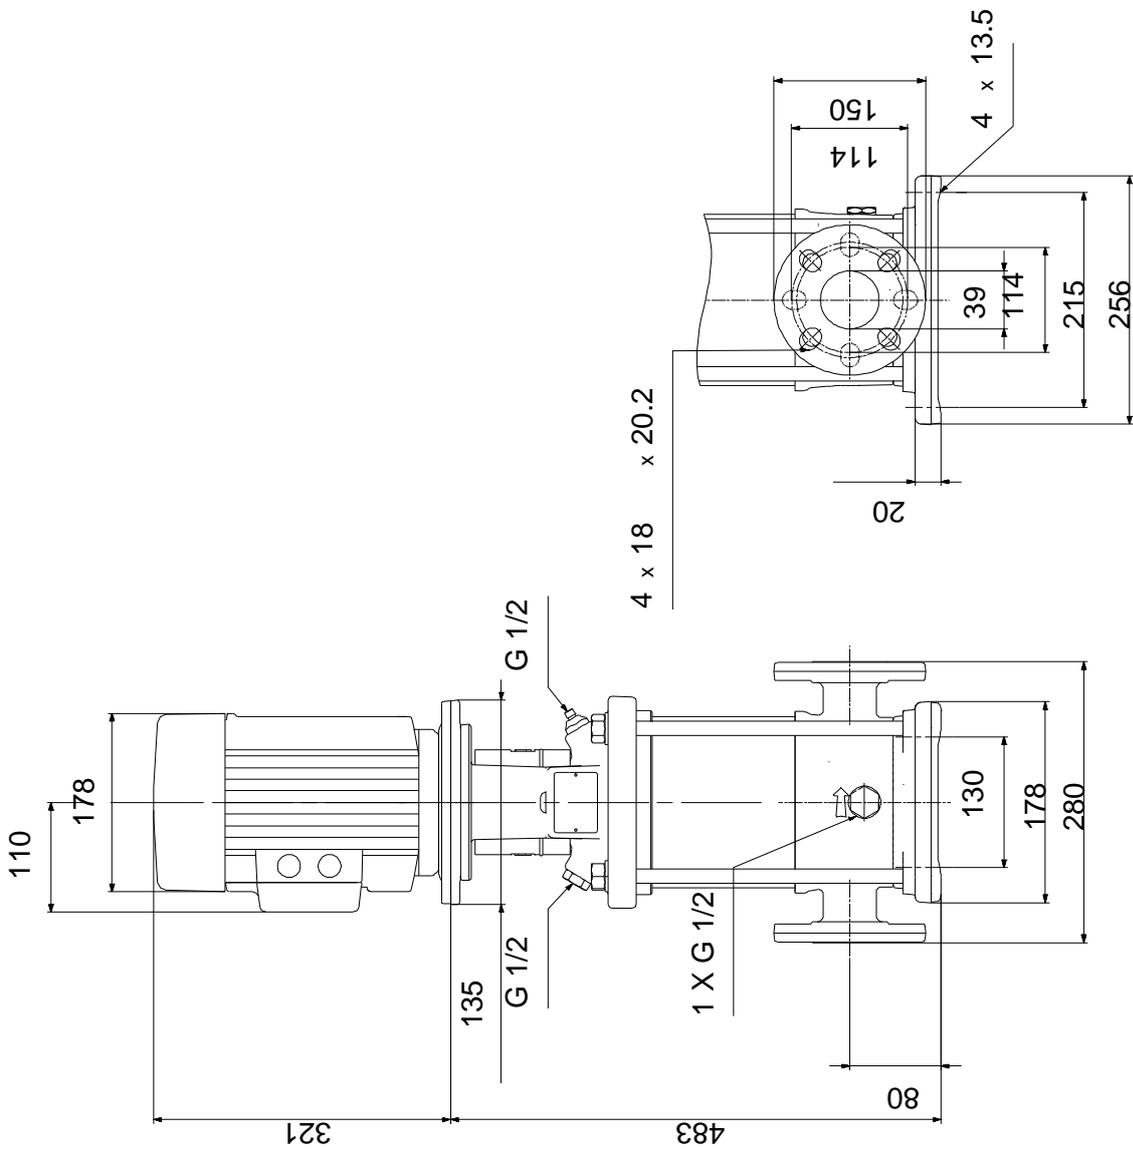

96501215 CR 10-6 A-FJ-A-E-HQQE 50

